



UDTJ-500 centrifugal egg cracker

Description

Capacity: 120 000 eggs/hour or 200 000 eggshells/hour

Replaces: 90 people

Power supply: 5.5 kW 400 V 3/N/PE 50/60 Hz
5.5 kW 230 V 3/N/PE 50/60 Hz

Dimensions: 1075x907x1040 mm
[42x36x41 in.]

Minimal workspace: 2000x2000 mm
[79x79 in.]

Weight: 265 kg [584 lbs]

Operated by: 2 persons

Compatibility: MX-2/4/6, UX-2/4/6,
PS-1



The UDTJ-500 is heavy duty, automatic centrifugal egg cracker used for production of fresh liquid egg and drying of eggshells obtained from hand or machine breaking. After filling the hopper, the eggs are cracked and the eggshells are filtered out with the use of a special rotating sieve with a mesh size of 0.8 mm. Clean egg liquid is then transported into a placed container and the eggshells are automatically removed from the machine. The machine is made out of stainless steel EN 1.4301 (AISI 304).



DATE
16.02.2022

PROJECT
DOK-LAVENI.K.3.1

AUTHOR
DI

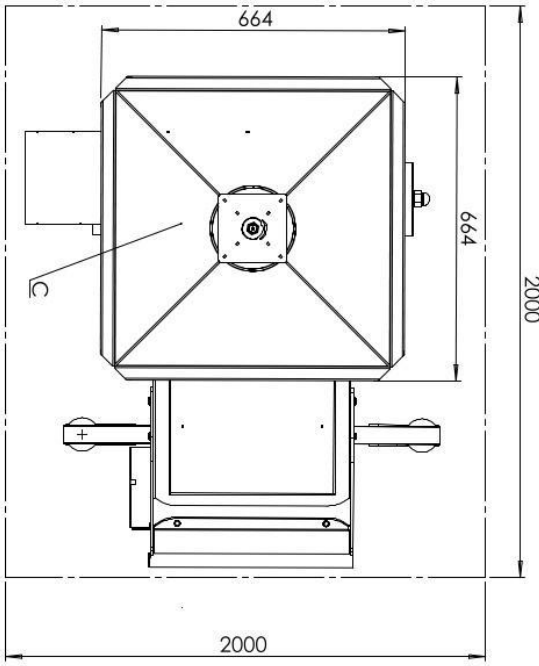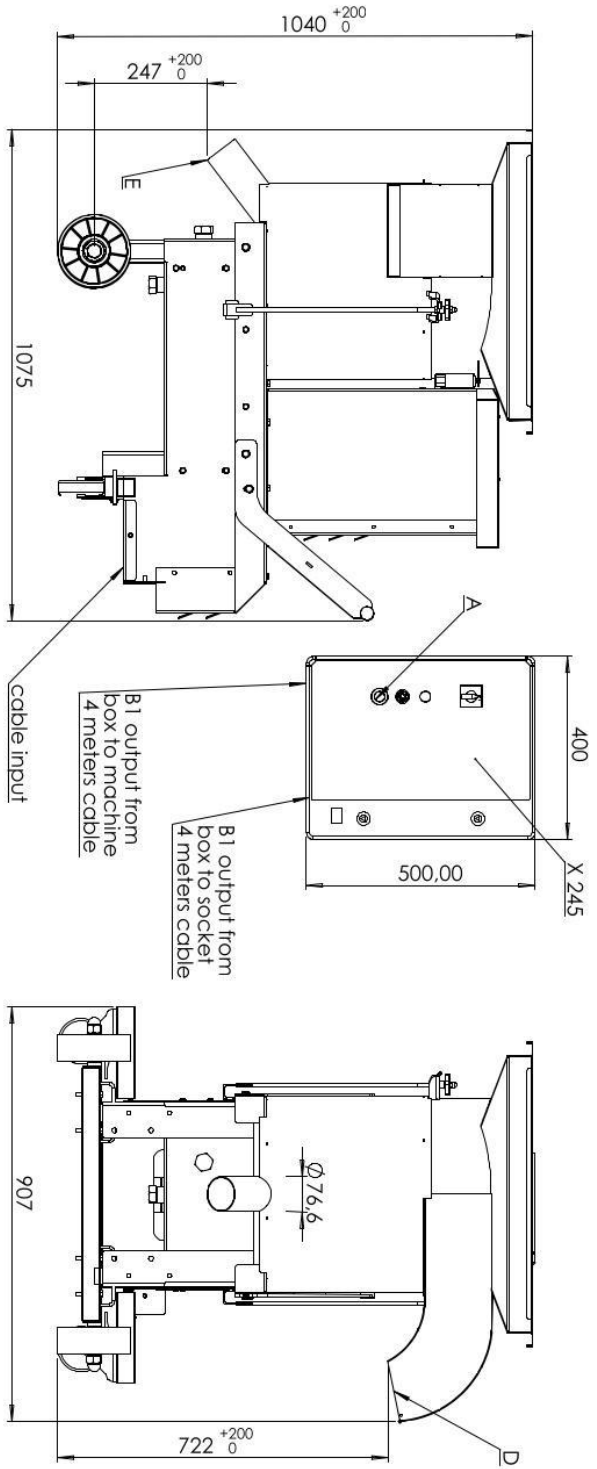

UDT1-500 centrifugal egg cracker

Typical workplaces:	egg breaking facilities, bakeries, confectioneries, pasta making companies
Capacity:	12000 eggs/hour
Power supply:	5.5 kW 400 V 3/N/PE 50/60 Hz 5.5 kW 230 V 3/N/PE 50/60 Hz
Water connection:	N/A
Compressed air connection:	N/A
Minimal workspace:	2000 x 2000
Dimensions:	1040 x 1075 x 907 mm
Operated by:	min. 2 persons
Minimal wall clearance:	the rear side—600 mm
Additional information	N/A
A	control panel
B1	connection electrical
C	eggs input outlet
D	liquid eggs outlet
E	

OVO TECH

EGG PROCESSING MACHINES

All rights reserved. No part of this document may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, without the prior written permission of OVO TECH. Any use of this document, including copying, is prohibited.