



UX-2 flood lamp

Description

Capacity: 13 000 eggs/hour

Replaces: n/a

Power supply: 3 kW 400 V 3/N/PE 50/60 Hz
3 kW 230 V 3/N/PE 50/60 Hz

Dimensions: 3200x1300x1500 mm

Minimal workspace: 5000x2500 mm

Compressed air: n/a

Weight: 360 kg

Water: n/a

Operated by: 3 persons

Drain: n/a

Compatibility: 2xVEL-30, RX-2, MX-2, UDTJ-150/500

The disinfecter emits UV-C light with the cumulative power of 950 Watts, which acts on the eggshells and disinfects them by killing 100% of bacteria, including Salmonella. The machine is made out of stainless steel EN 1.4301 (AISI 304).



OVO-TECH HQ

Boczna 43
27-200 Starachowice
Poland, European Union

OVO-TECH USA

1680 Michigan Avenue, Suite 700
Miami Beach, FL 33139
United States




Sales

Email: sales@egg-breakers.com
Tel (Int'l): +48 792 333 900
Tel (US): +1 310 432 3579

Social media



DATE	11.07.2022	AUTHOR	P.G.
PROJECT	UX-2		

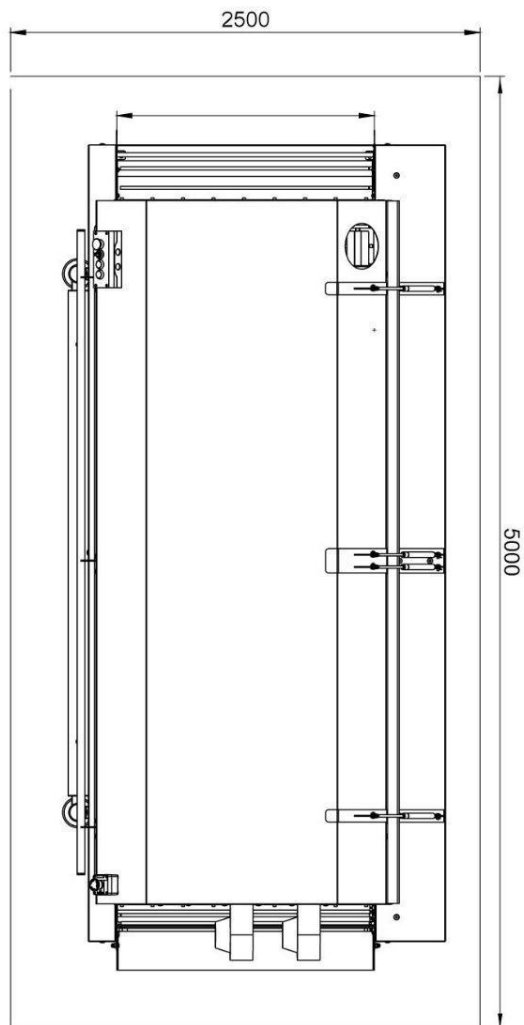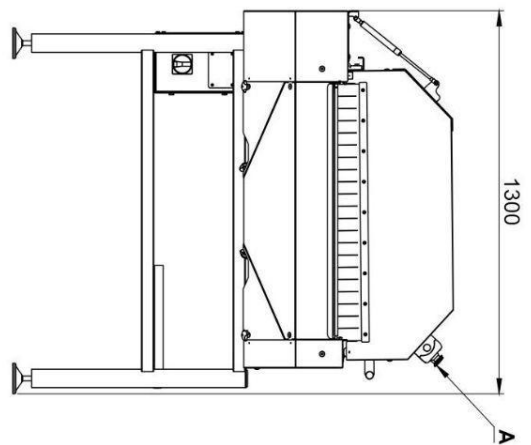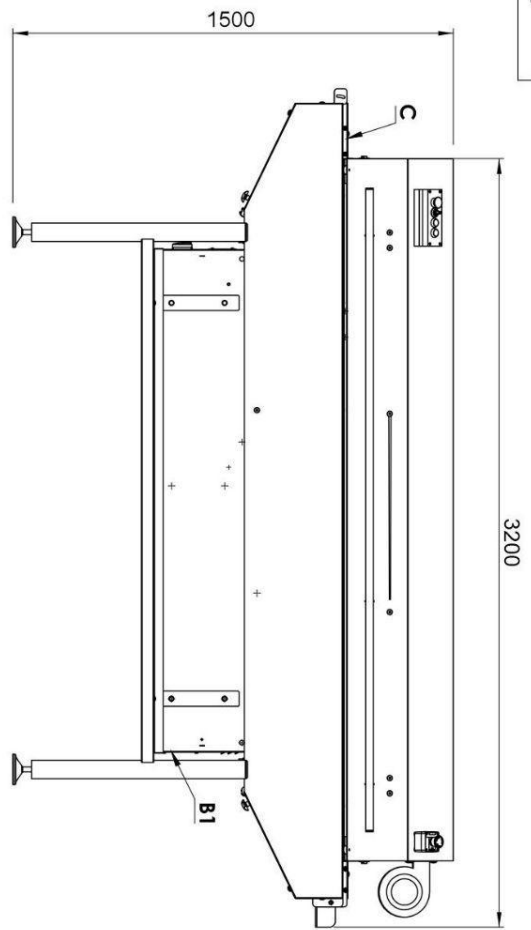

UX-2 flood lamp	
Typical workplaces:	egg breaking facilities, bakeries, confectioneries, pasta making companies
Capacity:	13 000 eggs/hour
Power supply:	3 kW 400 V, 3MPE 50/60 Hz 3 kW 230 V, 3MPE 50/60 Hz
Water connection:	N/A
Compressed air connection:	N/A
Minimal workspace:	5000 x 2500 mm
Dimensions:	3200 x 1300 x 1500 mm
Opened by:	3 persons
Minimal wall clearance:	the rear side - 600 mm
Additional information	N/A
A	control panel
B1/B2/B3	connection electrical/water/air
C	eggs input
D	eggs/white outlet
E	rigid egg outlet
F	rigid egg outlet
G	egg white outlet

OVO TECH

EGG PROCESSING MACHINES

All rights reserved
Information provided is for informational purposes only.
Any use of this material, including reproduction, distribution, or modification, without OVO TECH's written permission is strictly prohibited.