



## UX-6 flood lamp

## Description

**Capacity:** 39 000 eggs/hour

**Replaces:** n/a

**Power supply:** 5 kW 400 V 3/N/PE 50/60 Hz  
5 kW 230 V 3/N/PE 50/60 Hz

**Dimensions:** 3200x1500x1500 mm

**Minimal workspace:** 5000x3000 mm

**Compressed air:** n/a

**Weight:** 450 kg

**Water:** n/a

**Operated by:** 6 persons

**Drain:** n/a

**Compatibility:** 3xVEL-30, RX-6, MX-6, UDTJ-500

The disinfectant emits UV-C light with the cumulative power of 1900 Watts, which acts on the eggshells and disinfects them by killing 100% of bacteria, including Salmonella. The machine is made out of stainless steel EN 1.4301 (AISI 304).



### OVO-TECH HQ

Boczna 43  
27-200 Starachowice  
Poland, European Union

### OVO-TECH USA

1680 Michigan Avenue, Suite 700  
Miami Beach, FL 33139  
United States




### Sales

Email: [sales@egg-breakers.com](mailto:sales@egg-breakers.com)  
Tel (Int'l): +48 792 333 900  
Tel (US): +1 310 432 3579

### Social media



DATE	11.07.2022	AUTHOR	P.G.
PROJECT	UX-6		

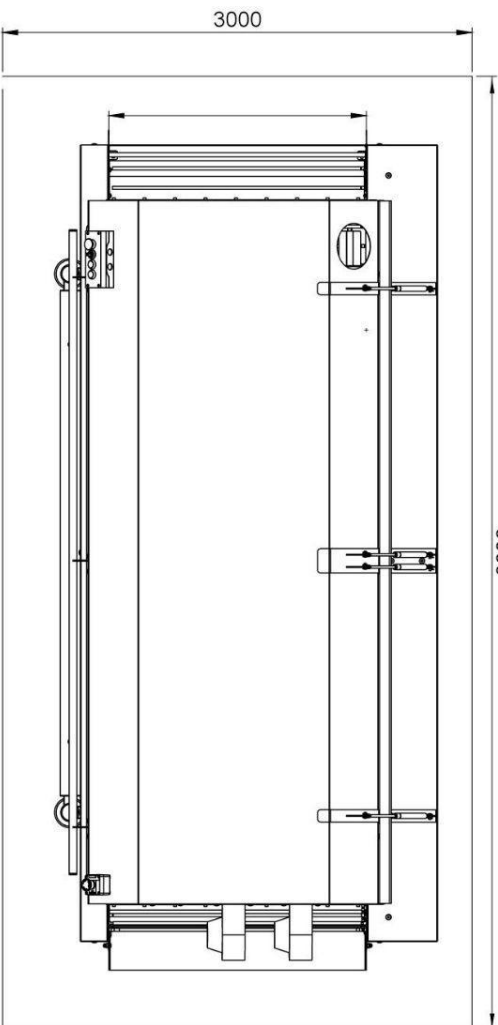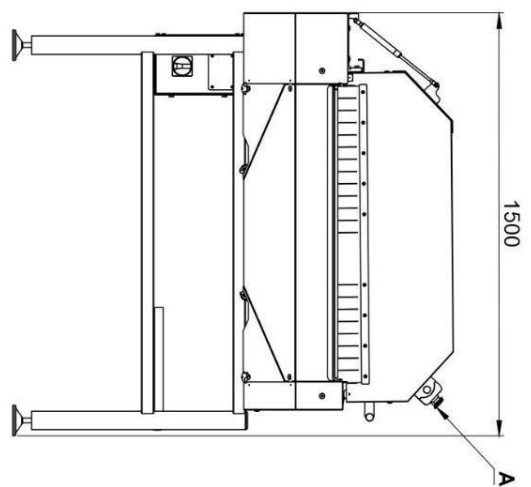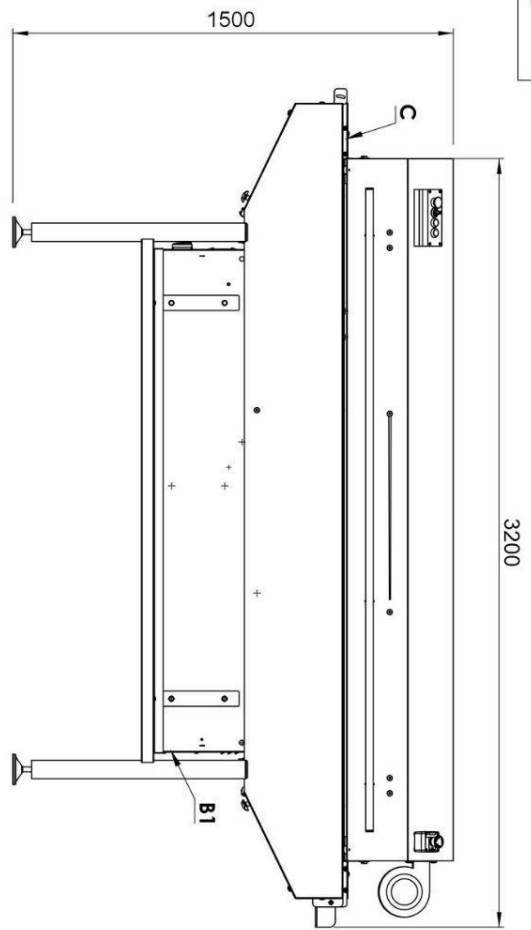

UX-6 flood lamp	
<b>Typical workplaces:</b>	egg breaking facilities, bakeries, confectioneries, pasta making companies
<b>Capacity:</b>	30 000 eggs/hour
<b>Power supply:</b>	5 kW 400 V, 3WPE 50/60 Hz 5 kW 230 V, 3WPE 50/60 Hz
<b>Water connection:</b>	N/A
<b>Compressed air connection:</b>	N/A
<b>Minimal workspace:</b>	5000 x 3000 mm
<b>Dimensions:</b>	3200 x 1500 x 1500 mm
<b>Opened by:</b>	6 persons
<b>Minimal wall clearance:</b>	the rear side - 600 mm
<b>Additional information</b>	N/A
<b>A</b>	control panel
<b>B1/B2/B3</b>	connection electrical/water/air
<b>C</b>	eggs input
<b>D</b>	eggs/eggs outlet
<b>E</b>	rigid egg outlet
<b>F</b>	rigid egg outlet
<b>G</b>	egg white outlet

**OVO TECH**

EGG PROCESSING MACHINES

All rights reserved  
Information provided is for informational purposes only.  
Any use of this material, including reproduction, is prohibited without OVO Tech's permission in writing.  
PROHIBED.