



UX-2 naświetlacz tunelowy

Opis

Wydajność: 13 000 jaj/godz.

Zastępuje: n/d

Zasilanie:
1.5 kW 400 V 3/N/PE 50/60 Hz
1.5 kW 230 V 3/N/PE 50/60 Hz

Wymiary: 2550x1235x1235 mm

Min. przestrzeń rob.: 3550x2235 mm

Sprężone powietrze: n/d

Waga: 390 kg

Woda: n/d

Obsługa: 3 osoby

Kanalizacja: n/d

Kompatybilność: 2xVEL-30, RX-2, MX-2, UDTJ-150/500, SAF

Naświetlacz emituje światło UV-C o łącznej mocy 950 W, które oddziałując na skorupę jaj, dezynfekuje je i eliminuje bakterie. Badania wykazały 100% skuteczność wykorzystywanego przez nas światła UV-C w eliminacji bakterii m.in. Salmonelli. Maszyna wykonana jest ze stali nierdzewnej INOX EN 1.4301 (AISI 304).



OVO-TECH HQ

Boczna 43
27-200 Starachowice
Polska, Unia Europejska




Sprzedaż

Email: sales@egg-breakers.com
Tel: +48 792 333 900

Social media



DATE	11.07.2022	AUTHOR	P.G.
PROJECT	UX-2		

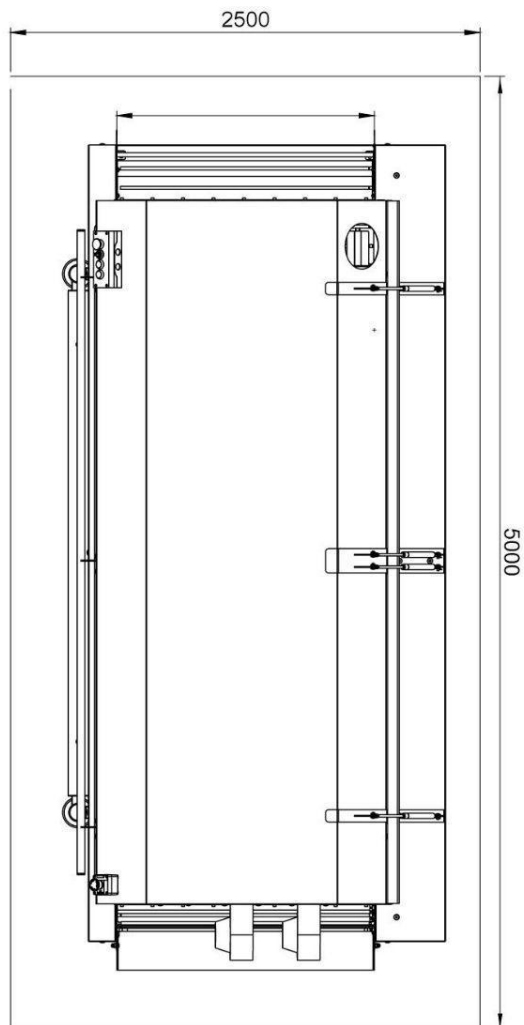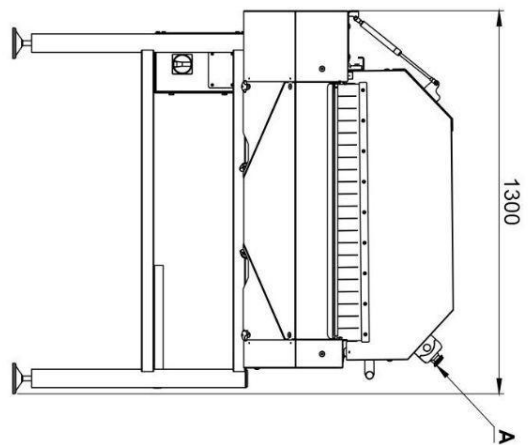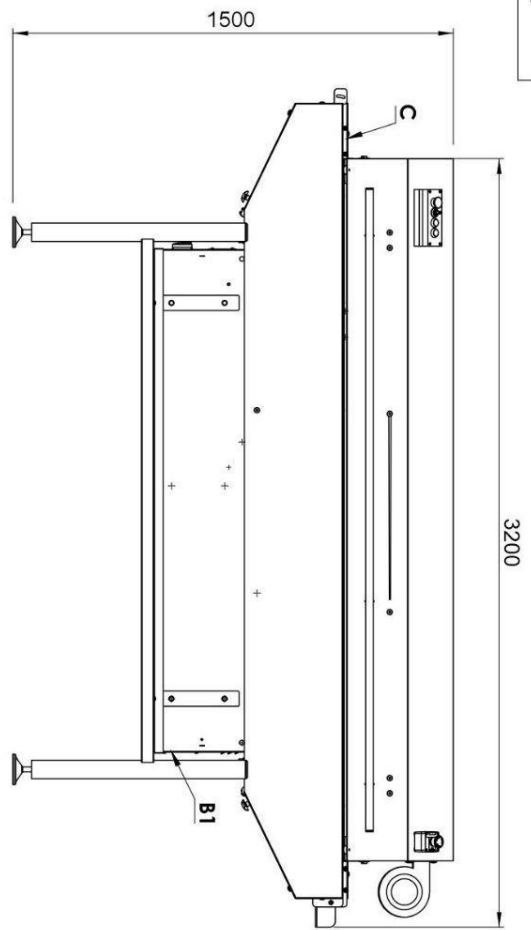

UX-2 flood lamp	
Typical workplaces:	egg breaking facilities, bakeries, confectioneries, pasta making companies
Capacity:	13 000 eggs/hour
Power supply:	3 kW 400 V, 3MPE 50/60 Hz 3 kW 230 V, 3MPE 50/60 Hz
Water connection:	N/A
Compressed air connection:	N/A
Minimal workspace:	5000 x 2500 mm
Dimensions:	3200 x 1300 x 1500 mm
Opened by:	3 persons
Minimal wall clearance:	the rear side - 600 mm
Additional information	N/A
A	control panel
B1/B2/B3	connection electrical/water/air
C	eggs input
D	eggs/white outlet
E	rigid egg outlet
F	rigid egg outlet
G	egg white outlet

OVO TECH

EGG PROCESSING MACHINES

All rights reserved

Information provided in this document is for informational purposes only. Any use of this material, including reproduction, distribution, or modification, without OVO Tech's written permission is strictly prohibited.