OVO TECH
EGG PROCESSING MACHINES

OS-1 Öler


Beschreibung

Der schützende Ölfilm verlangsamt den Gewichtsverlust und verlängert so die Haltbarkeit der Eier. Es ist verboten, die Maschine mit Hochdruckwasser zu reinigen. Alle Teile unserer Maschinen, die mit Eiern in Kontakt kommen, bestehen aus Edelstahl EN 1.4301 (AISI 304) oder Kunststoff aus der Lebensmittelindustrie gefertigt.

Kapazität: 6500 Eier/Stunde

Ersetzt: nicht zutreffend

Versorgung:	3.5kW 400V 3/N/PE 50/60 Hz, 3.5kW 230V 3/N/PE 50/60 Hz
Druckluft:	nicht zutreffend
Wasser:	nicht zutreffend
Kanalisation:	nicht zutreffend
Abmessungen:	4082x1381x1327 mm
Minimaler Arbeitsraum:	5100x2400 mm
Gewicht:	600 kg
Bedienung:	1 Mitarbeiter
Kompatibilität:	MX-1, UX-1

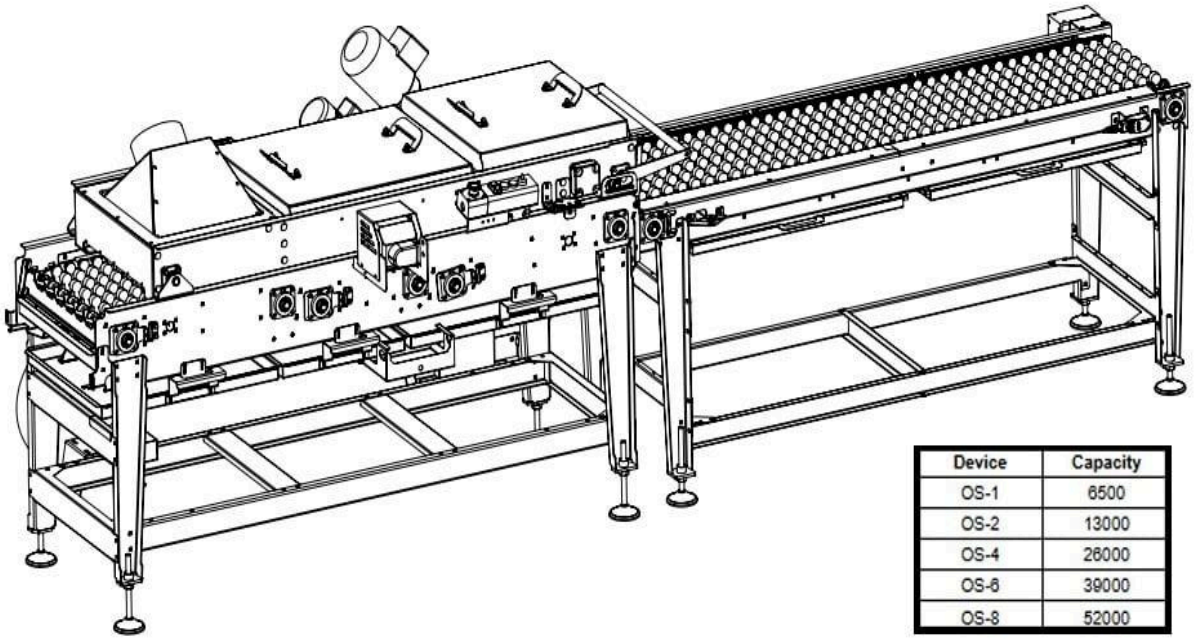

Device	Capacity
OS-1	6500
OS-2	13000
OS-4	26000
OS-6	39000
OS-8	52000


OVO-TECH HQ
Boczna 43
27-200 Starachowice
Poland, European Union


Sales
Email: sales@egg-breakers.com
Tel (Int'l): +48 792 333 900


Social media

DATE	AUTHOR
10.04.2025	RM

PROJECT
OS - 1

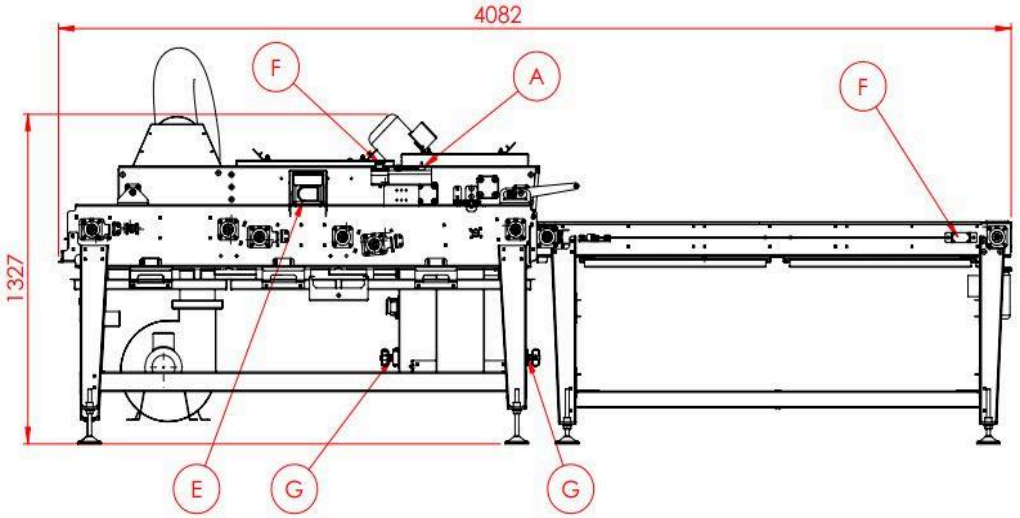

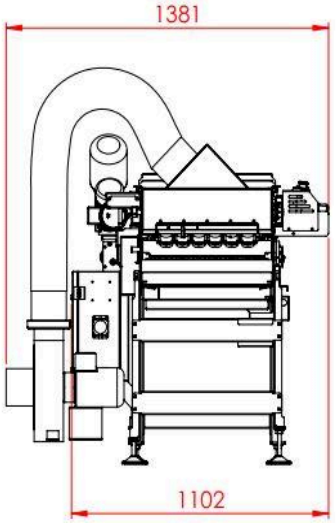

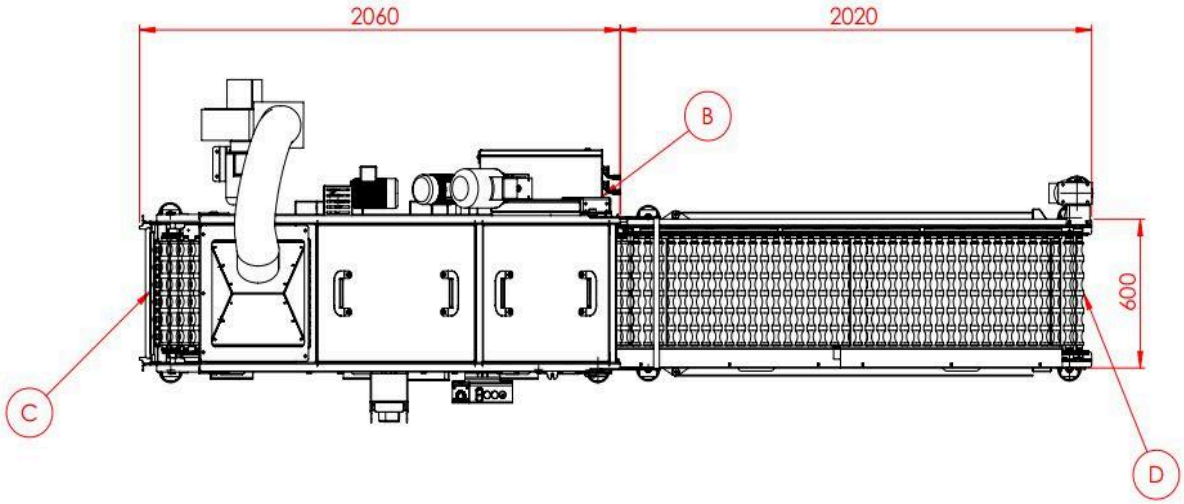

OS 1	
Typical workplaces:	egg breaking facilities, confectioneries
Capacity:	max 6500 eggs/hour
Power supply:	3.5kW 400V 3/N/PE 50/60 Hz 3.5kW 230V 3/N/PE 50/60 Hz
Water connection:	-
Compressed air connection:	-
Minimal workspace:	5100 x 2400 mm
Dimensions:	4080 x 1380 x 1330
Operated by:	1person
Minimal wall clearance:	the rear side –600 mm
Additional information	N/A
A B C D E F G	control panel electrical connection eggs inlet eggs outlet oil pump emergency stop data connector to other machines

OVO TECH
EGG PROCESSING MACHINES

All rights reserved
Information presented in this drawing is the sole property of OVO-TECH. Any use of this material, including reproduction of parts or in whole without a written permission is strictly prohibited.