OVO TECH
EGG PROCESSING MACHINES

OS-1 oiling system


Description

The protective oil film slows down weight loss extends egg shelf life. Do not wash the machine with the use of pressure washers. All parts of our machines which come in contact with eggs are made out of stainless steel EN 1.4301 (AISI 304) or plastic used in the food industry.

Capacity: **6500** eggs/hour

Replaces: n/a

Power supply:	3.5kW 400V 3/N/PE 50/60 Hz, 3.5kW 230V 3/N/PE 50/60 Hz
Compressed air:	n/a
Water:	n/a
Drain:	n/a
Dimensions:	4082x1381x1327 mm [161x55x52 in]
Minimal workspace:	5100x2400 mm [201x95 in]
Weight:	600 kg [1330 lbs]
Operated by:	1 person
Compatibility:	MX-1, UX-1

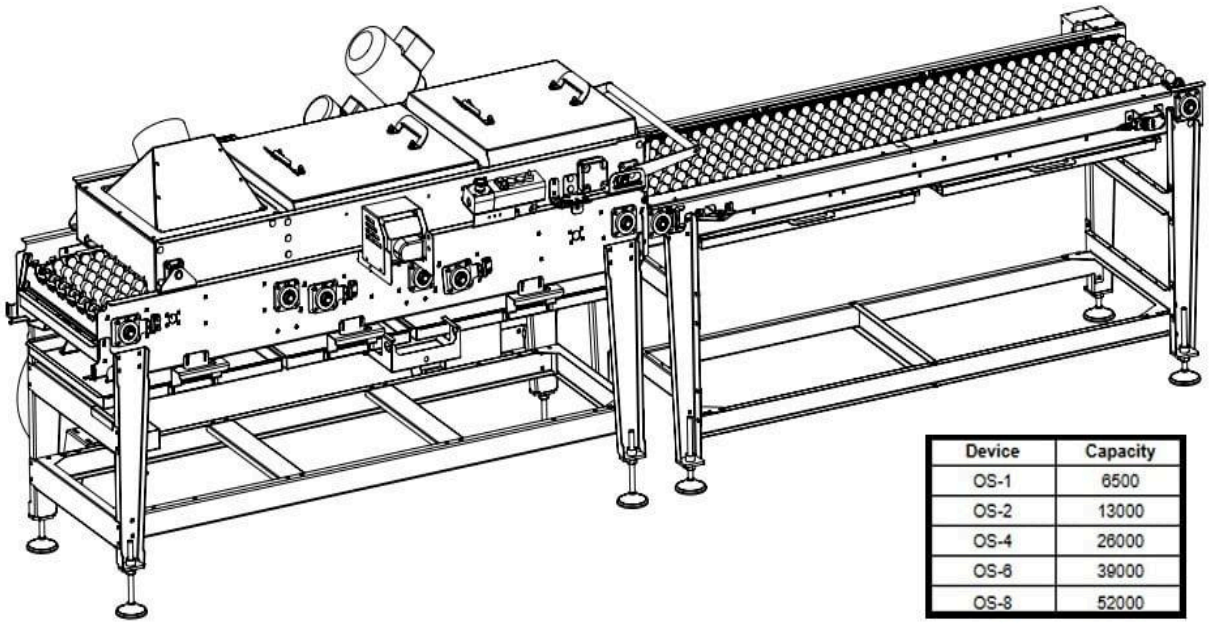

Device	Capacity
OS-1	6500
OS-2	13000
OS-4	26000
OS-6	39000
OS-8	52000


OVO-TECH HQ
Boczna 43
27-200 Starachowice
Poland, European Union


Sales
Email: sales@egg-breakers.com
Tel (Int'l): +48 792 333 900


Social media

DATE	AUTHOR
10.04.2025	RM

PROJECT
OS - 1

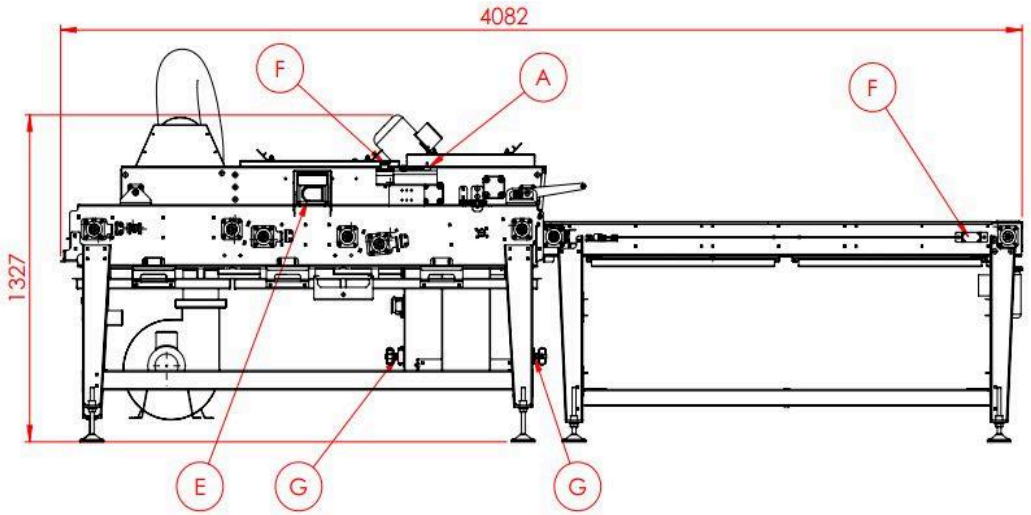

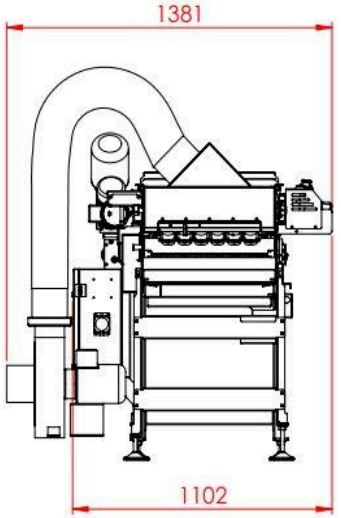

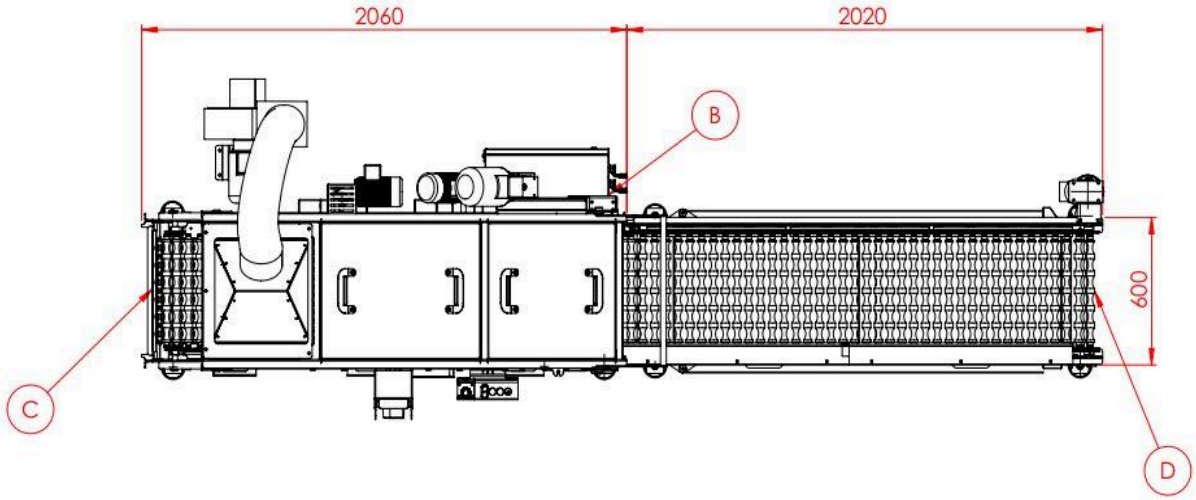

OS 1	
Typical workplaces:	egg breaking facilities, confectioneries
Capacity:	max 6500 eggs/hour
Power supply:	3.5kW 400V 3/N/PE 50/60 Hz 3.5kW 230V 3/N/PE 50/60 Hz
Water connection:	-
Compressed air connection:	-
Minimal workspace:	5100 x 2400 mm
Dimensions:	4080 x 1380 x 1330
Operated by:	1person
Minimal wall clearance:	the rear side –600 mm
Additional information	N/A
A B C D E F G	control panel electrical connection eggs inlet eggs outlet oil pump emergency stop data connector to other machines

OVO TECH
EGG PROCESSING MACHINES

All rights reserved
Information presented in this drawing is the sole property of OVO-TECH. Any use of this material, including reproduction of parts or in whole without a written permission is strictly prohibited.