PM/PM BOX Eierpumpe

Beschreibung

Die Pumpen PM und PM BOX werden zum Transport der Eimasse verwendet. Die kompakte Abmessung, einfache Handhabung und ein robustes Gehäuse sind an die Anforderungen unter rauen Arbeitsbedingungen angepasst. Alle Teile unserer Maschinen, die mit Eiern in Kontakt kommen, bestehen aus Edelstahl EN 1.4301 (AISI 304) hergestellt oder Kunststoff aus der Lebensmittelindustrie gefertigt.

Kapazität: 3500 Liter/Stunde


Ersetzt: nicht zutreffend

Versorgung:	0.75 kW 400 V 3/N/PE 50/60 Hz 0.75 kW 230 V 3/N/PE 50/60 Hz 1 kW 110 V 1/N/PE 50/60 Hz+VFD	**Abmessungen:**	577x215x326 mm
		Minimaler Arbeitsraum:	500x1000 mm
Druckluft:	nicht zutreffend	**Gewicht:**	20 kg
Wasser:	nicht zutreffend	**Bedienung:**	1 Mitarbeiter
Kanalisation:	nicht zutreffend	**Kompatibilität:**	FS, M-350





PM – flüssige Eierpumpe

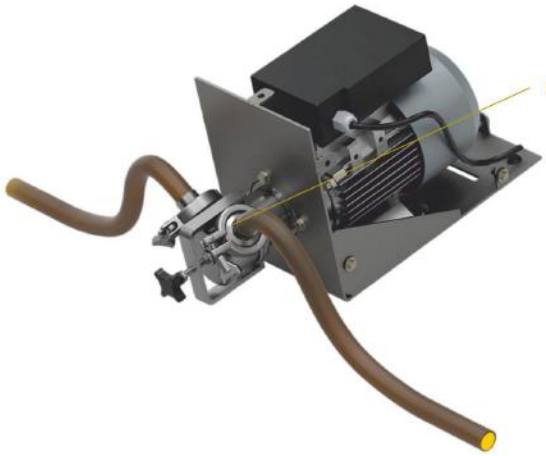

PM BOX– flüssige Eierpumpe




OVO-TECH HQ
Boczna 43
27-200 Starachowice
Poland, European Union


Sales
Email: sales@egg-breakers.com
Tel (Int'l): +48 792 333 900


Social media


DATE	AUTHOR
04.01.2021	ML

PROJECT
DOK-LAY-EN.1G.2.1



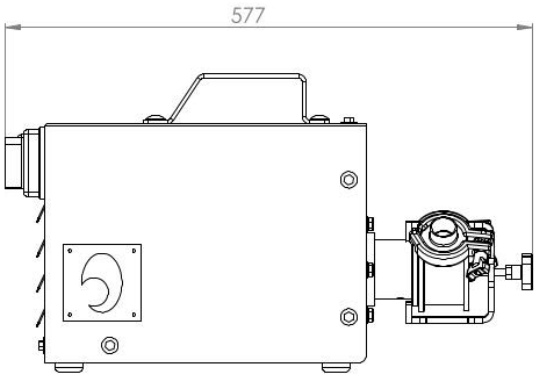

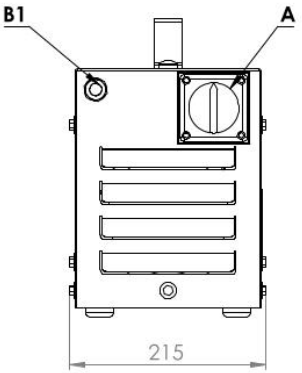

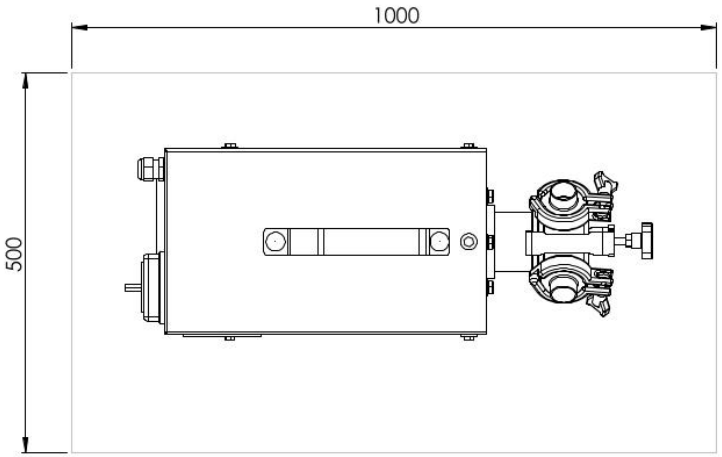

PM/PM BOX pump system	
Typical workplaces:	egg breaking facilities, bakeries, confectioneries, pasta making companies
Capacity:	3500 liters/hour
Power supply:	0.75 kW 400V 3/N/PE 50/60 Hz 0.75 kW 230V 3/N/PE 50/60 Hz 0.75 kW 230V 1/N/PE 50/60 Hz 0.75 kW 110V 1/N/PE 50/60 Hz
Water connection:	N/A
Compressed air connection:	N/A
Minimal workspace:	500 x 1000 mm
Dimensions:	577x 215 x 326 mm
Operated by:	1 person
Minimal wall clearance:	the rear side ~600 mm
Additional information	N/A
A B1/B2/B3 C D E	control panel conection: electrical/water/air eggs input eggshells outlet liquid egg outlet

OVO TECH
EGG PROCESSING MACHINES

All rights reserved
Information presented in this drawing is the sole property of OVO-TECH. Any use of this material, including reproduction of parts or in whole without a written permission is strictly prohibited.