OVO TECH
EGG PROCESSING MACHINES

Proyector de túnel **UX-2**

Descripción

El reflector emite luz UV-C (950 vatios), que al actuar sobre las cáscaras de los huevos administrados los desinfecta y mata las bacterias (también Salmonella). Todas las partes de nuestras máquinas que entran en contacto con los huevos están hechas de acero inoxidable EN 1.4301 (AISI 304).

Capacidad: 13 000 huevos/hora

Reemplaza: n/a

Entrada de alimentación:	1.5 kW 400 V 3/N/PE 50/60 Hz 1.5 kW 230 V 3/N/PE 50/60 Hz	**Dimensiones:**	2550x1235x1235 mm
		Espacio de trabajo mínimo:	3550x2235 mm
Aire comprimido:	n/a	**Peso:**	390 kg
Agua:	n/a	**Operado por:**	3 personas
Fuga:	n/a	**Compatibilidad:**	2xVEL-30, RX-2, MX-2, UDTJ-150/500, SAF






OVO-TECH HQ
Boczna 43
27-200 Starachowice
Poland, European Union


Sales
Email: sales@egg-breakers.com
Tel (Int'l): +48 792 333 900


Social media

DATE	AUTHOR
20.09.2023	MJ

PROJECT
UX-2 (2EN)

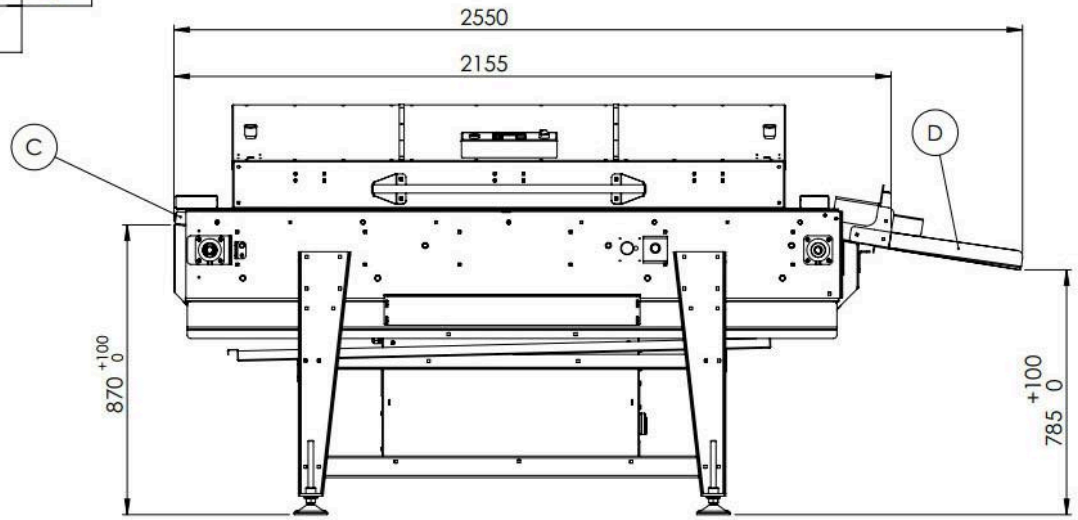

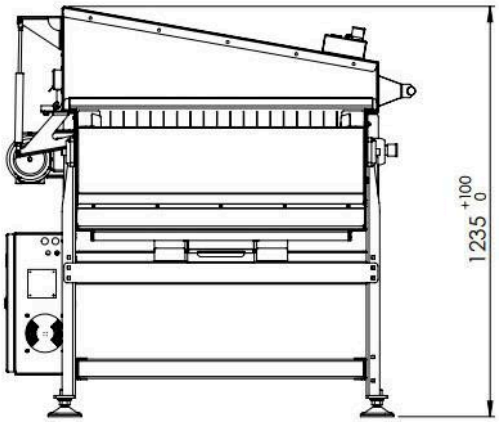

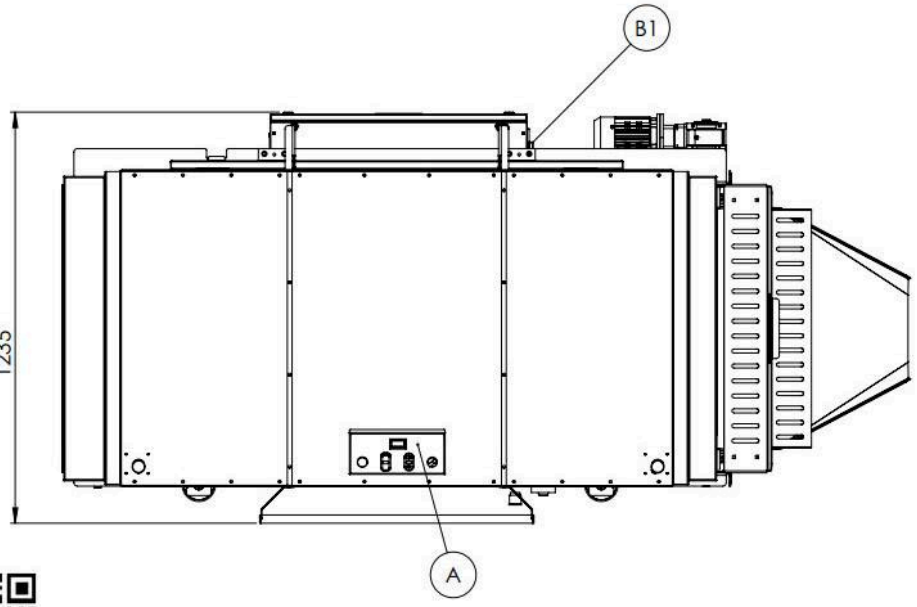

UX-2 flood lamp

Typical workplaces:	egg breaking facilities, bakeries, confectioneries, pasta making companies
Capacity:	max 13000 eggs/hour
Power supply:	1,5kW 400V 3/N/PE 50/60 Hz 1,5kW 230V 3/N/PE 50/60 Hz
Water connection:	N/A
Compressed air connection:	N/A
Minimal workspace:	3550 x 2235 mm
Dimensions:	2550 x 1235 x 1235
Operated by:	1-2 person
Minimal wall clearance:	the rear side ~600 mm
Additional information	N/A
A B1 C D	control panel connections: electrical eggs input eggs output

OVO TECH
EGG PROCESSING MACHINES

All rights reserved
Information presented in this drawing is the sole property of OVO-TECH. Any use of this material, including reproduction of parts or in whole without a written permission is strictly prohibited.