OVO TECH
EGG PROCESSING MACHINES

UX-4 naświetlacz tunelowy

Opis

Naświetlacz emituje światło UV-C o łącznej mocy 950 W, które oddziaływując na skorupy jaj, dezynfekuje je i eliminuje bakterie. Badania wykazały 100% skuteczność wykorzystywanego przez nas światła UV-C w eliminacji bakterii m.in. Salmonelli. Maszyna wykonana jest ze stali nierdzewnej INOX EN 1.4301 (AISI 304).

Wydajność: **26 000 jaj/godz.**

Zastępuje: **n/d**

Zasilanie:	3 kW 400 V 3/N/PE 50/60 Hz 3 kW 230 V 3/N/PE 50/60 Hz	**Wymiary:**	3800x1300x1235 mm
		Min. przestrzeń rob.:	4800x2300 mm
Sprężone powietrze:	n/d	**Waga:**	
Woda:	n/d	**Obsługa:**	4 osoby
Kanalizacja:	n/d	**Kompatybilność:**	2xVEL-30, RX-4, MX-4, UDTJ-150/500, SAF






OVO-TECH HQ
Boczna 43
27-200 Starachowice
Polska, Unia Europejska


Sprzedaż
Email: sales@egg-breakers.com
Tel: +48 792 333 900


Social media


DATE	AUTHOR
17.02.2022	DI

PROJECT
DOK-LAY-EN.W.3.1

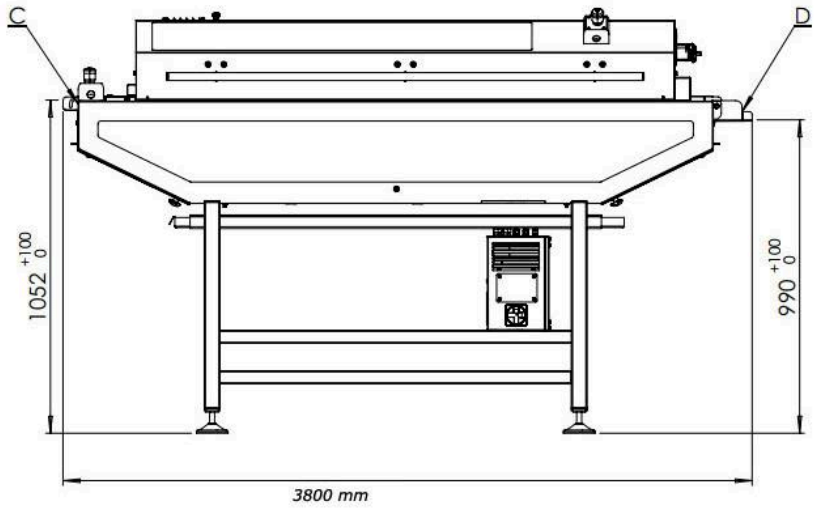

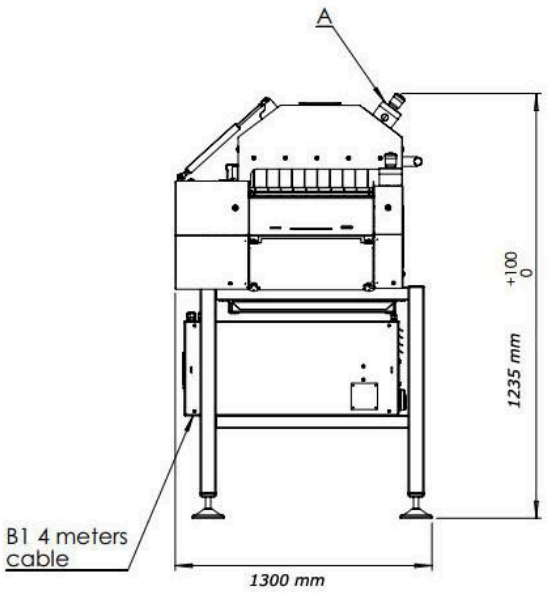

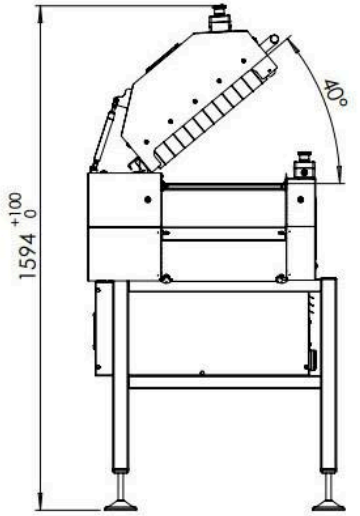

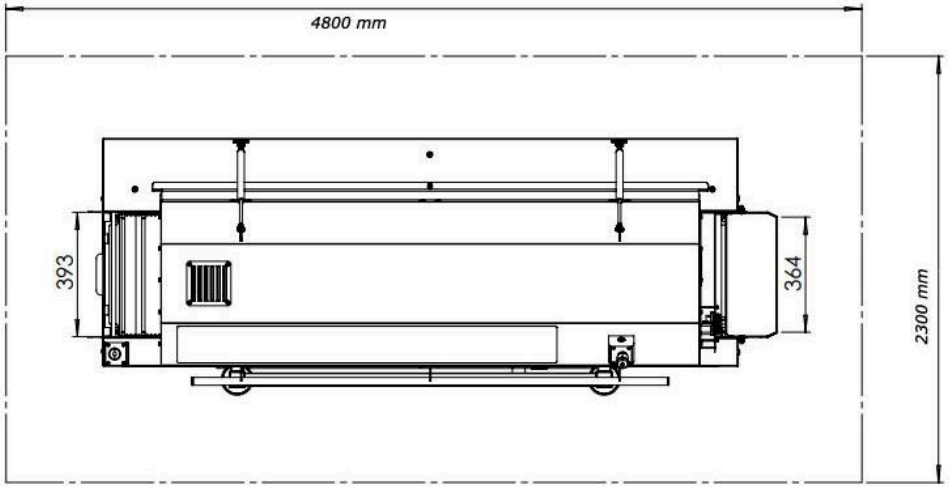

UX-4 flood lamp

Typical workplaces:	egg breaking facilities, bakeries, confectioneries, pasta making companies
Capacity:	6500 eggs/hour
Power supply:	1.5 kW 400 V 3/N/PE 50/60 Hz 1.5 kW 230 V 3/N/PE 50/60 Hz
Water connection:	N/A
Compressed air connection:	N/A
Minimal workspace:	4800 x 2300 mm
Dimensions:	3800 x 1300 x 1235 mm
Operated by:	1-2 persons
Minimal wall clearance:	the rear side ~600 mm
Additional information	N/A
A B1 C D	control panel conection: electrical/water/air eggs input eggs output

OVO TECH
EGG PROCESSING MACHINES

All rights reserved
Information presented in this drawing is the sole property of OVO-TECH. Any use of this material, including reproduction of parts or in whole without a written permission is strictly prohibited.