OVO TECH
EGG PROCESSING MACHINES

Proyector de túnel **UX-6**

Descripción

El reflector emite luz UV-C (1900 vatios), que al actuar sobre las cáscaras de los huevos administrados los desinfecta y mata las bacterias (también Salmonella). Todas las partes de nuestras máquinas que entran en contacto con los huevos están hechas de acero inoxidable EN 1.4301 (AISI 304).

Capacidad: **39 000 huevos/hora**

Reemplaza: **n/a**

Entrada de alimentación:	4 kW 400 V 3/N/PE 50/60 Hz 4 kW 230 V 3/N/PE 50/60 Hz	**Dimensiones:**	3800x1300x1235 mm
		Espacio de trabajo mínimo:	4800x2300 mm
Aire comprimido:	n/a	**Peso:**	
Agua:	n/a	**Operado por:**	5 personas
Fuga:	n/a	**Compatibilidad:**	3xVEL-30, RX-6, MX-6, UDTJ-500, SAF






OVO-TECH HQ
Boczna 43
27-200 Starachowice
Poland, European Union


Sales
Email: sales@egg-breakers.com
Tel (Int'l): +48 792 333 900


Social media


DATE	AUTHOR
17.02.2022	DI

PROJECT
DOK-LAY-EN.W.3.1

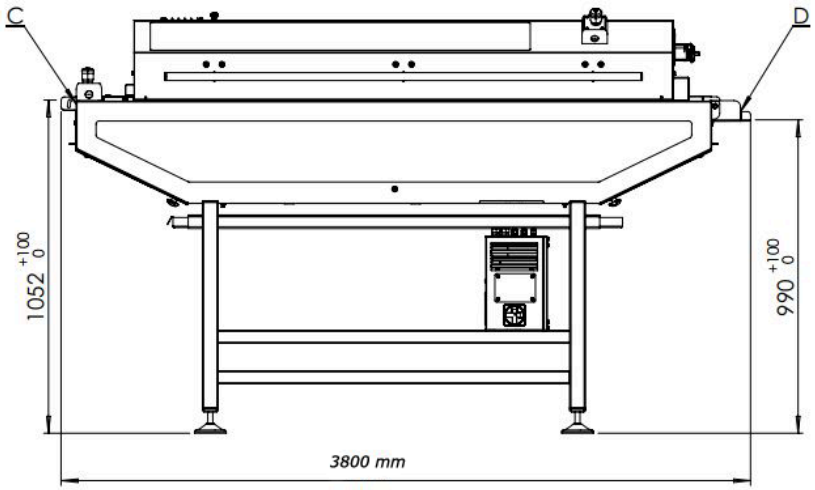

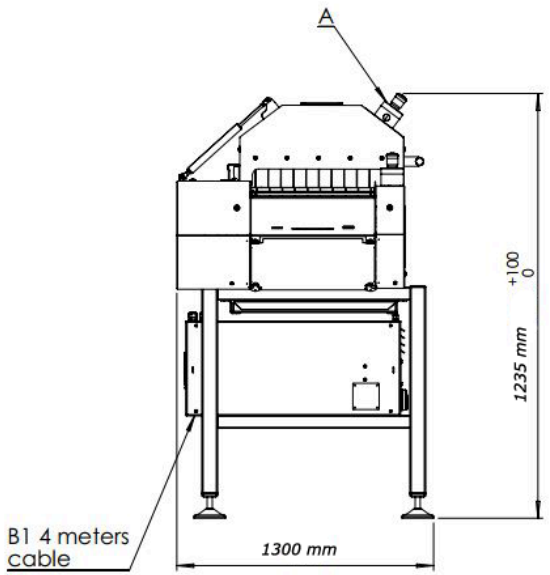

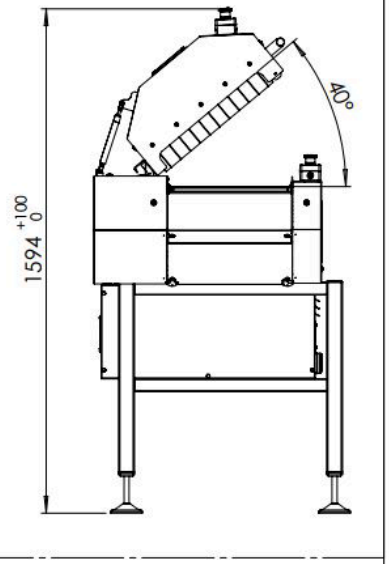

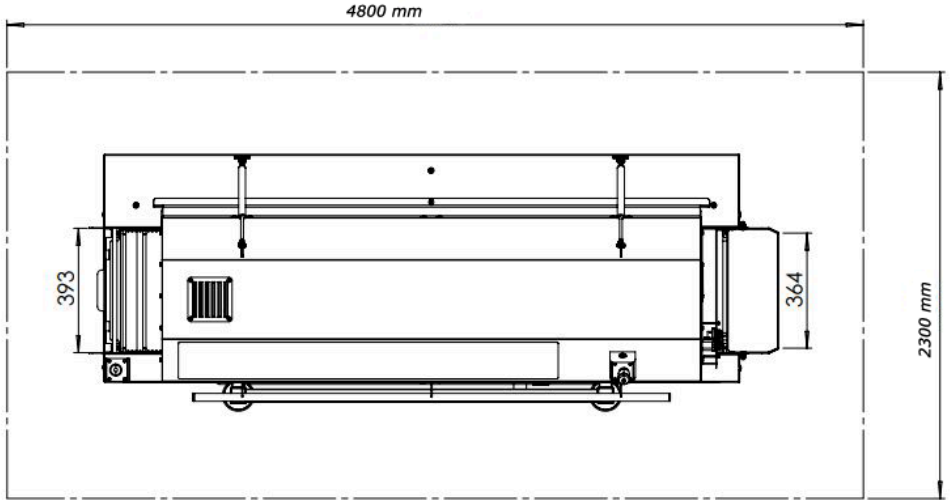

OVO TECH
EGG PROCESSING MACHINES
All rights reserved
Information presented in this drawing is the sole property of OVO-TECH. Any use of this material, including reproduction of parts or in whole without a written permission is strictly prohibited.

*UX-6 **flood lamp***

Typical workplaces:	*egg breaking facilities, bakeries, confectioneries, pasta making companies*
Capacity:	*39000 eggs/hour*
Power supply:	*4 kW 400 V 3/N/PE 50/60 Hz* *4 kW 230 V 3/N/PE 50/60 Hz*
Water connection:	*N/A*
Compressed air connection:	*N/A*
Minimal workspace:	*4800 x 2300 mm*
Dimensions:	*3800 x x1300 x x1235 mm*
Operated by:	*5 persons*
Minimal wall clearance:	*the rear side –600 mm*
Additional information	*N/A*
A *B1* *C* *D*	*control panel* *conection: electrical/water/air* *eggs input* *eggs output*