UX-6 naświetlacz tunelowy

Opis

Naświetlacz emituje światło UV-C o łącznej mocy 1900 W, które oddziaływując na skorupy jaj, dezynfekuje je i eliminuje bakterie. Badania wykazały 100% skuteczność wykorzystywanego przez nas światła UV-C w eliminacji bakterii m.in. Salmonelli. Maszyna wykonana jest ze stali nierdzewnej INOX EN 1.4301 (AISI 304).

Wydajność: 39 000 jaj/godz.

Zastępuje: n/d

Zasilanie:	4 kW 400 V 3/N/PE 50/60 Hz 4 kW 230 V 3/N/PE 50/60 Hz	**Wymiary:**	3800x1300x1235 mm
		Min. przestrzeń rob.:	4800x2300 mm
Sprężone powietrze:	n/d	**Waga:**	
Woda:	n/d	**Obsługa:**	5 osób
Kanalizacja:	n/d	**Kompatybilność:**	3xVEL-30, RX-6, MX-6, UDTJ-500, SAF






OVO-TECH HQ
Boczna 43
27-200 Starachowice
Polska, Unia Europejska


Sprzedaż
Email: sales@egg-breakers.com
Tel: +48 792 333 900


Social media


DATE	AUTHOR
17.02.2022	DI

PROJECT
DOK-LAY-EN.W.3.1

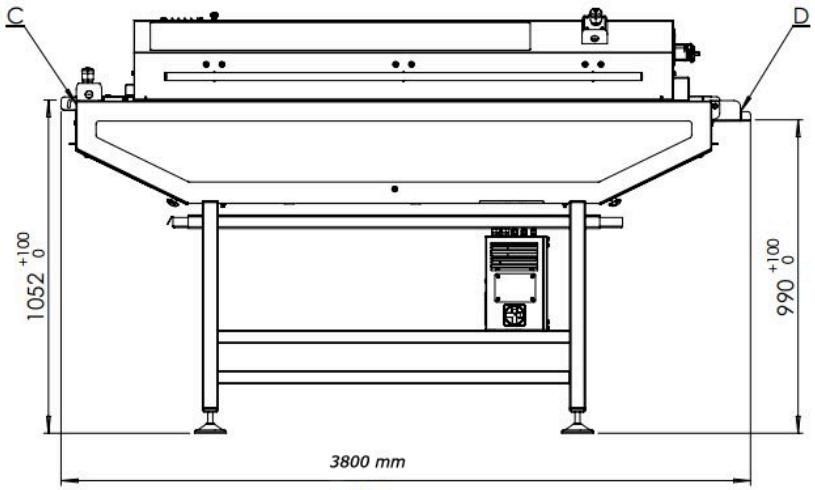

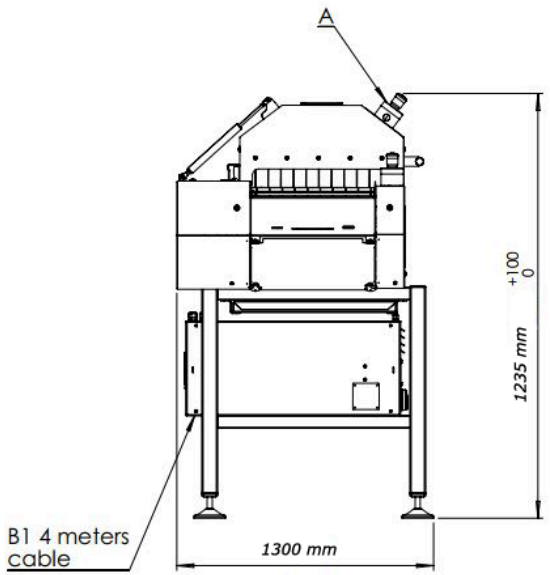

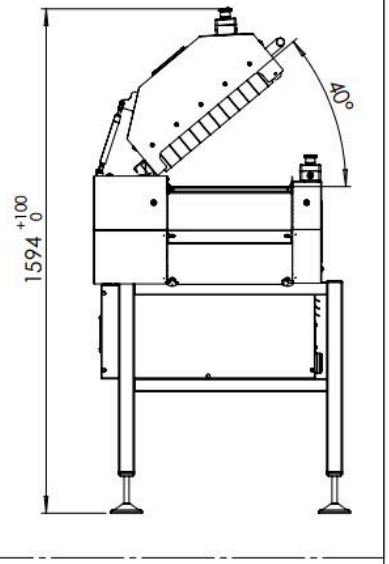

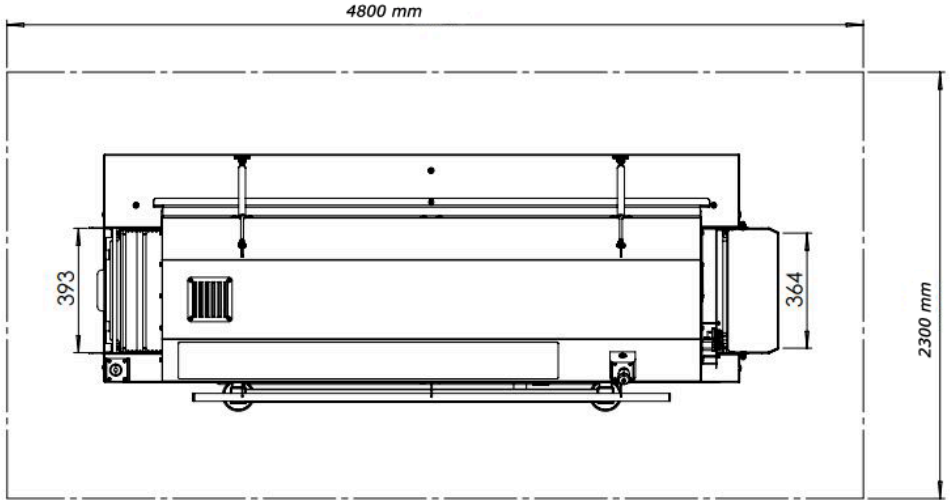

OVO TECH
EGG PROCESSING MACHINES
All rights reserved
Information presented in this drawing is the sole property of OVO-TECH. Any use of this material, including reproduction of parts or in whole without a written permission is strictly prohibited.

*UX-6 **flood lamp***

Typical workplaces:	*egg breaking facilities, bakeries, confectioneries, pasta making companies*
Capacity:	*39000 eggs/hour*
Power supply:	*4 kW 400 V 3/N/PE 50/60 Hz* *4 kW 230 V 3/N/PE 50/60 Hz*
Water connection:	*N/A*
Compressed air connection:	*N/A*
Minimal workspace:	*4800 x 2300 mm*
Dimensions:	*3800 x x1300 x x1235 mm*
Operated by:	*5 persons*
Minimal wall clearance:	*the rear side –600 mm*
Additional information	*N/A*
A *B1* *C* *D*	*control panel* *conection: electrical/water/air* *eggs input* *eggs output*