VEL-30 Eierförderer

Beschreibung

Der Eierförderer greift mit Hilfe von Gummisaugern und dem erzeugten Unterdruck die Eier. So können die Eier bequem und sicher vom Eierkarton in die Maschine transportiert werden. Alle Teile unserer Maschinen, die mit Eiern in Kontakt kommen, bestehen aus Edelstahl EN 1.4301 (AISI 304) hergestellt.

Kapazität:	**30 Eier gleichzeitig**
Ersetzt:	**nicht zutreffend**

Versorgung:	0.37 kW 230 V 1/N/PE 50/60 Hz 0.45 kW 230 V 2/PE 50/60 Hz 1 kW 110 V 1/N/PE 50/60 Hz+VFD	**Abmessungen:**	476x325x354 mm
		Minimaler Arbeitsraum:	800x1200 mm
Druckluft:	nicht zutreffend	**Gewicht:**	25 kg
Wasser:	nicht zutreffend	**Bedienung:**	1 Mitarbeiter
Kanalisation:	nicht zutreffend	**Kompatibilität:**	RZ-1, RX-0/2/4/6, MX-2/4/6, UX-2/4/6




OVO-TECH HQ
Boczna 43
27-200 Starachowice
Poland, European Union


Sales
Email: sales@egg-breakers.com
Tel (Int'l): +48 792 333 900


Social media


DATE	AUTHOR
17.02.2022	DI

PROJECT
DOK-LAY-EN.M.3.1




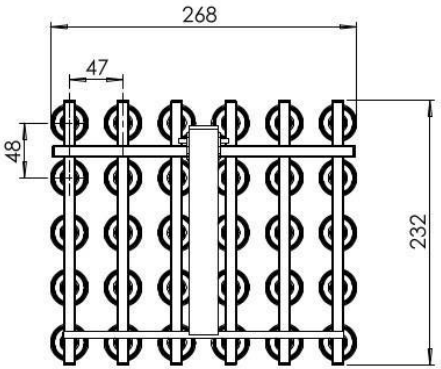






B3 ∅ 1" 3 meters
air duct

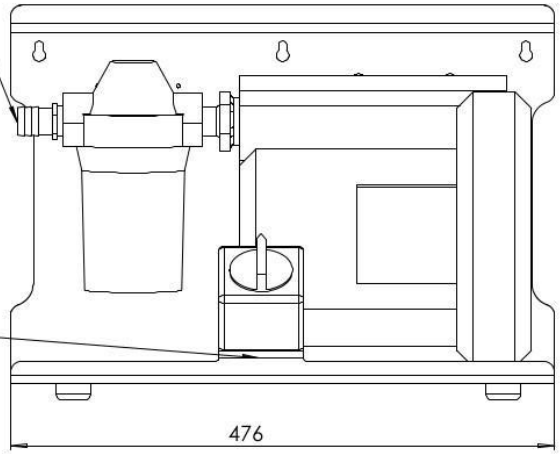

B1 2 meters
cable

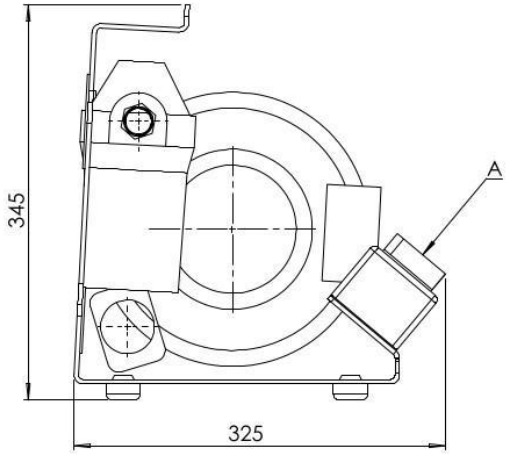

VEL-30 vacuum egg lifter

Typical workplaces:	*egg breaking facilities, bakeries, confectioneries, pasta making companies*
Capacity:	*30 eggs*
Power supply:	*0,37 kW 230 V 1/N/PE 50/60 Hz* *0,45 kW 230 V 2/PE 50/60 Hz*
Water connection:	*N/A*
Compressed air connection:	*N/A*
Minimal workspace:	*800 X 1200 mm*
Dimensions:	*476 X 325 X 354 mm*
Operated by:	*1 person*
Minimal wall clearance:	*the rear side ~600 mm*
Additional information	*N/A*
A *B1/B3*	*control panel* *conection: electrical/air*

OVO TECH
EGG PROCESSING MACHINES

All rights reserved
Information presented in this drawing is the sole property of OVO-TECH. Any use of this material, including reproduction of parts or in whole without a written permission is strictly prohibited.