OVO TECH
EGG PROCESSING MACHINES

UDTJ-10 wirówka do jaj

Osób

Wydajność: zalecana **10 000 jaj/godz.**

Zastępuje: **8-16 osób**

Zasilanie:	1.1 kW 230 V 1/N/PE 50/60 Hz 1.1 kW 110 V 1/N/PE 50/60 Hz	**Wymiary:**	518x700x880 mm
		Min. przestrzeń rob.:	1500x1500 mm
Sprężone powietrze:	n/d	**Waga:**	60 kg
Woda:	n/d	**Obsługa:**	1 osoba
Kanalizacja:	n/d	**Kompatybilność:**	PS-1

Wirówka UDTJ-10 to urządzenie półautomatyczne wykorzystywane do produkcji świeżej masy jajecznej. Po zasypaniu zasobnika jajkami, urządzenie rozbija jajka oraz oddziela skorupy od masy jajecznej poprzez wykorzystanie wewnętrznego sita. Po przerobieniu 210 jaj w jednym cyklu, należy ręcznie opróżnić sito ze skorup. Maszyna wykonana jest ze stali nierdzewnej INOX EN 1.4301 (AISI 304).

Maszyna posiada certyfikat NSF/ANSI 8 - Commercial Powered Food Preparation Equipment standard.










OVO-TECH HQ
Boczna 43
27-200 Starachowice
Polska, Unia Europejska


Sprzedaż
Email: sales@egg-breakers.com
Tel: +48 792 333 900


Social media

DATE	AUTHOR
10.05.2022	PG

PROJECT
DOK-LAY-EN,A,4.1

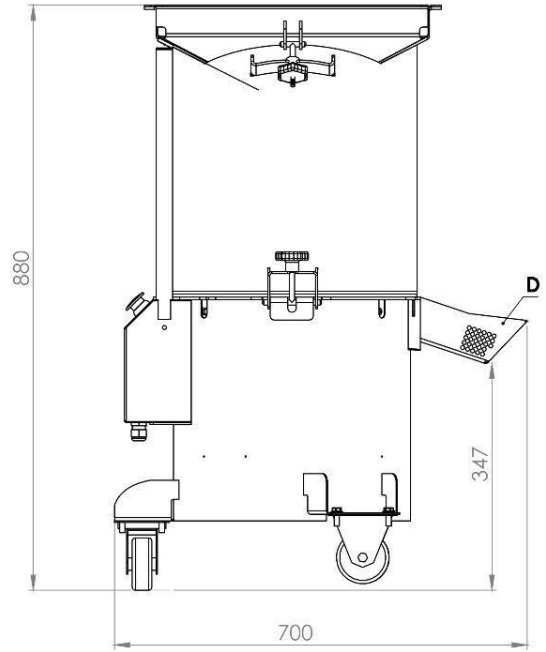

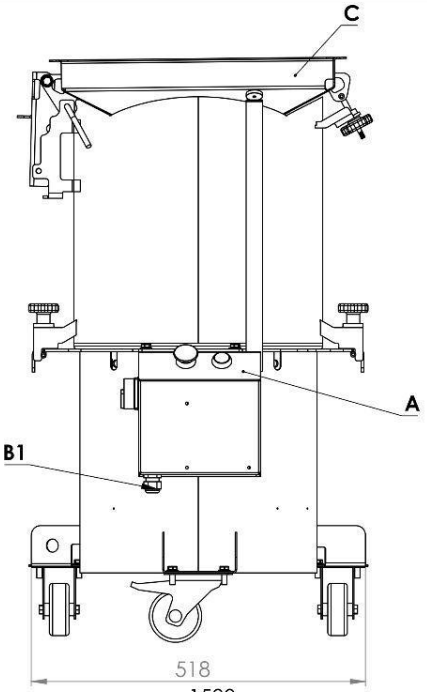

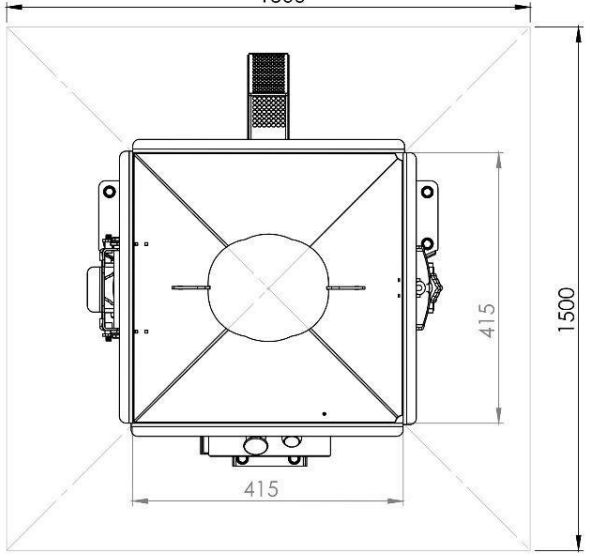

UDTJ-10 NSF centrifugal egg cracker

Typical workplaces	*egg breaking facilities, bakeries, confectioneries, pasta making companies*
Capacity:	*4000 eggs/hour*
Power supply:	*1.1 kW 110V 1/N/PE 50/60 Hz* *1.1 kW 230 V 1/N/PE 50/60 Hz* *1.1 kW 230 V 3/N/PE 50/60 Hz* *1.1 kW 400 V 3/N/PE 50/60 Hz*
Water connection:	*N/A*
Compressed air connection:	*N/A*
Minimal workspace:	*1500x1500*
Dimensions:	*518 x 700 x 880 mm*
Operated by:	*1 person*
Minimal wall clearance:	*the rear side ~600 mm*
Additional information	*N/A*
A ***B1*** ***C*** ***D***	*control panel* *conection: electrical* *eggs input* *liquid egg outlet*

OVO TECH
EGG PROCESSING MACHINES

All rights reserved
Information presented in this drawing is the sole property of OVO-TECH. Any use of this material, including reproduction of parts or in whole without a written permission is strictly prohibited.