OVO TECH
EGG PROCESSING MACHINES

UX-1 naświetlacz tunelowy

Opis

Naświetlacz emituje światło UV-C o łącznej mocy 950 W, które oddziaływując na skorupy jaj, dezynfekuje je i eliminuje bakterie. Badania wykazały 100% skuteczność wykorzystywanego przez nas światła UV-C w eliminacji bakterii m.in. Salmonelli. Maszyna wykonana jest ze stali nierdzewnej INOX EN 1.4301 (AISI 304).

Wydajność: 6500 jaj/godz.

Zastępuje: n/d

Zasilanie:	1.5 kW 400 V 3/N/PE 50/60 Hz 1.5 kW 230 V 3/N/PE 50/60 Hz	**Wymiary:**	2550x1235x1235 mm
		Min. przestrzeń robocza:	3550x2235 mm
Sprężone powietrze:	n/d	**Waga:**	390 kg
Woda:	n/d	**Obsługa:**	1-2 osoby
Kanalizacja:	n/d	**Kompatybilność:**	2xVEL-30, MX-1, UDTJ-150/500, RX-1, SAF






OVO-TECH HQ
Boczna 43
27-200 Starachowice
Poland, European Union


Sales
Email: sales@egg-breakers.com
Tel (Int'l): +48 792 333 900


Social media


DATE	AUTHOR
17.02.2022	DI

PROJECT
DOK-LAY-EN.W.3.1

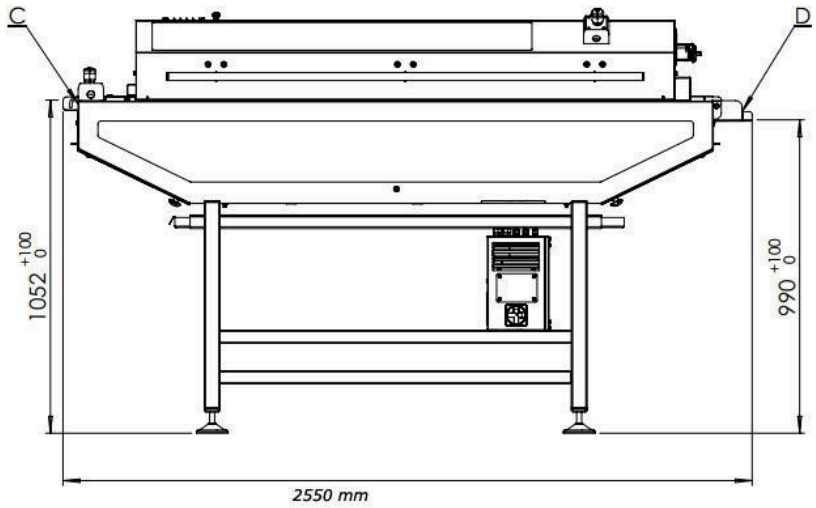

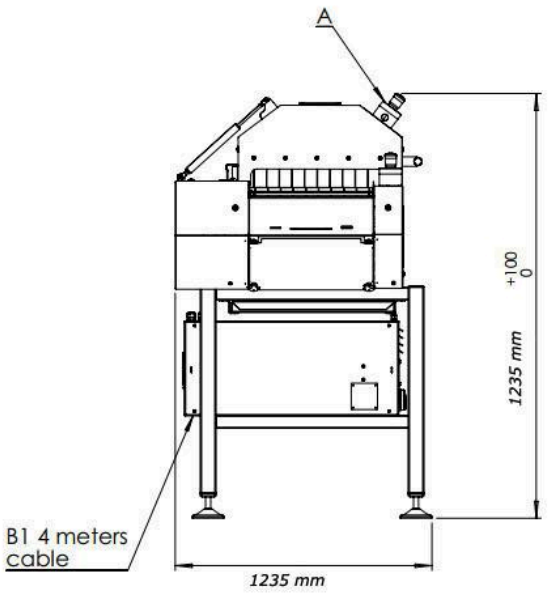

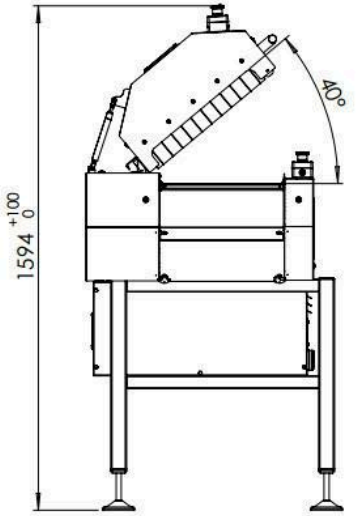

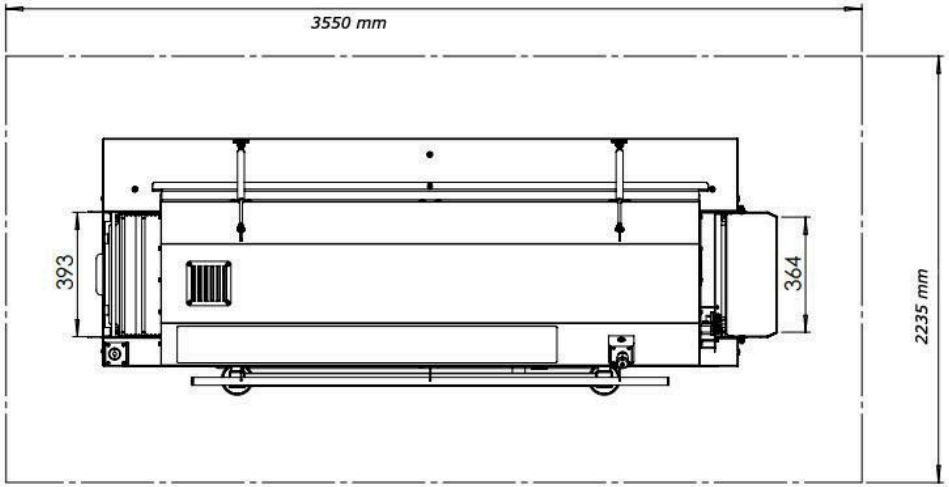

UX-1 **flood lamp**	
Typical workplaces:	egg breaking facilities, bakeries, confectioneries, pasta making companies
Capacity:	6500 eggs/hour
Power supply:	1.5 kW 400 V 3/N/PE 50/60 Hz 1.5 kW 230 V 3/N/PE 50/60 Hz
Water connection:	N/A
Compressed air connection:	N/A
Minimal workspace:	3550 x 2235 mm
Dimensions:	2550 x 1235 x 1235 mm
Operated by:	1-2 persons
Minimal wall clearance:	the rear side –600 mm
Additional information	N/A
A B1 C D	control panel conection: electrical/water/air eggs input eggs output

OVO TECH
EGG PROCESSING MACHINES

All rights reserved
Information presented in this drawing is the sole property of OVO-TECH. Any use of this material, including reproduction of parts or in whole without a written permission is strictly prohibited.