



RX-6 egg breaker

Description

Capacity: 39 000 eggs/hour

Replaces: 85 people

Power supply: 2.5 kW 400 V 3/N/PE 50/60 Hz
2.5 kW 230 V 3/N/PE 50/60 Hz

Dimensions: 4525x1535x1850 mm

Minimal workspace: 5500x2500 mm



Compressed air: n/a

Weight: 540 kg



Water: water from client's installation

Operated by: 4-5 persons



Drain: n/a

Compatibility: 3xVEL-30, MX-6, UX-6, 2xPS-1

The egg breaker imitates the work of human hands by cracking the eggshells with the use of special knives. The machine's high capacity is attributed to the use of a rotating knife mechanism. After being cracked open, eggs slide down a separator, where yolks are separated from egg whites. This most hygienic egg breaking method is an innovation by OVO-TECH. After completion of the job, the machine can be closed and cleaned with the use of a CIP system.

The RX-6 egg breaker breaks eggs using six rows of highly specialized knife mechanisms. Eggs are automatically fed into the machine from a belt feeder. Yolk and white separation is accomplished with the use of four perpendicularly placed separators.

The machine is made out of stainless steel EN 1.4301 (AISI 304).



OVO-TECH HQ

Boczna 43
27-200 Starachowice
Poland, European Union

OVO-TECH USA



1680 Michigan Avenue, Suite 700
Miami Beach, FL 33139
United States

Sales

Email: sales@egg-breakers.com
Tel (Int'l): +48 792 333 900
Tel (US): +1 310 432 3579

Social media



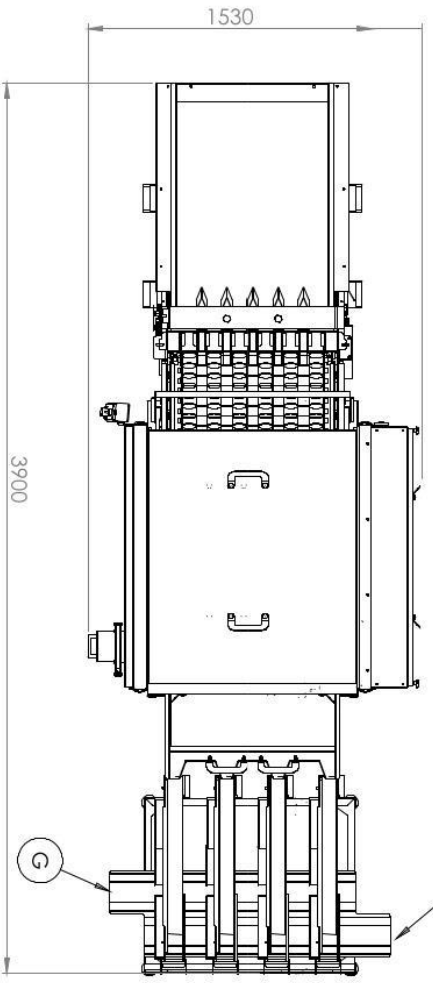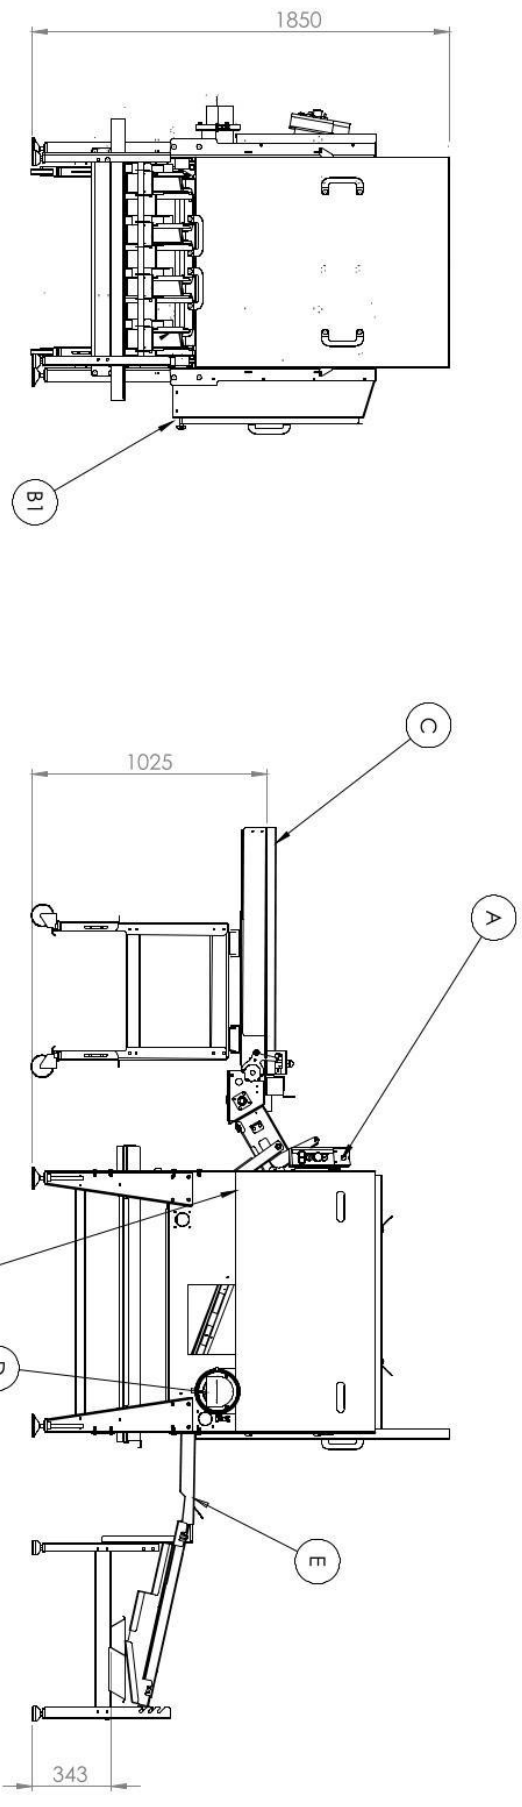

RX 6	
Typical workplaces:	egg breaking facilities, bakeries, confectioneries, pasta making companies
Capacity:	max. 30000 eggs/hour
Power supply:	3kW 400V 3N/PE 50/60 Hz 2kW 230V 3N/PE 50/60 Hz
Water connection:	input 1" output 2"
Compressed air connection:	
Minimal workspace:	4300 x 3000 mm
Dimensions:	3550x1530x1550
Opened by:	4-5 persons
Minimal wall clearance:	the rear side - 600 mm
Additional information:	N/A
A	control panel
B1/B2	connection electrical/water
C	eggs input
D	eggs/peels outlet
E	eggs yolks outlet
F	eggs yolks outlet
G	egg white outlet



All rights reserved. Any use of this product, including reproduction, without OVO TECH permission is strictly prohibited.