OVO TECH
EGG PROCESSING MACHINES

Rompe huevos **RX-1**

Capacidad: 3000-6500 huevos/hora

Reemplaza: 14 personas

Entrada de alimentación:	0.5 kW 230 V 1/N/PE 50/60 Hz 0.5 kW 110 V 1/N/PE 50/60 Hz
Aire comprimido:	n/a
Agua:	se requiere conexión
Fuga:	n/a
Dimensiones:	1950x1163x1480 mm
Espacio de trabajo mínimo:	2950x2165 mm
Peso:	280 kg
Operado por:	1-2 personas
Compatibilidad:	MX-1, UX-1, PS-1, VEL-30

Descripción

La quebradora de huevos RX-1 utiliza un alimentador autodirigido con un sistema de rodillos especialmente disenados para transportar los huevos a su sección de quebrantamiento. La rompehuevos RX nano rompe huevos y tiene la función de separar las yemas de las claras. Además, la quebradora de huevos RX-1 tiene una regulación de velocidad suave. El operador puede ajustar la velocidad en cualquier momento. La altura de las cuchillas y su fuerza de impacto son ajustables, lo que es muy útil cuando se rompen huevos con cáscaras débiles. Después de completar el trabajo, la máquina se puede limpiar con un sistema CIP incorporado. La máquina está fabricada en acero inoxidable EN 1.4301 (AISI 304).




OVO-TECH HQ
Boczna 43
27-200 Starachowice
Poland, European Union


Sales
Email: sales@egg-breakers.com
Tel (Int'l): +48 792 333 900


Social media

DATE	AUTHOR
17.07.2024	MJ

PROJECT
RX-1

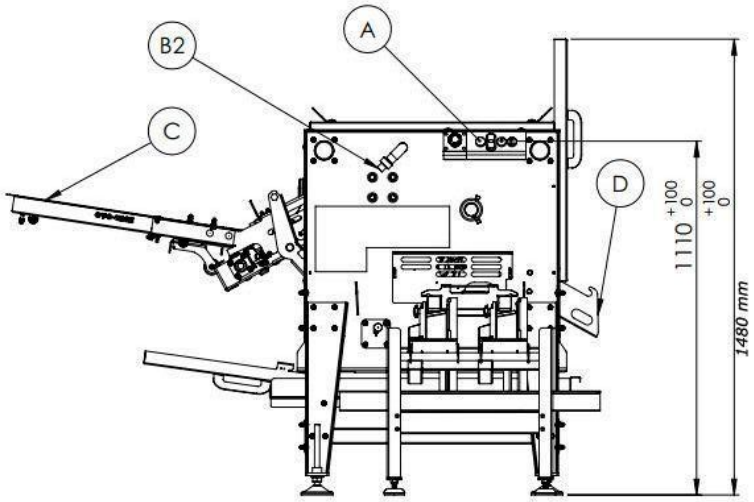

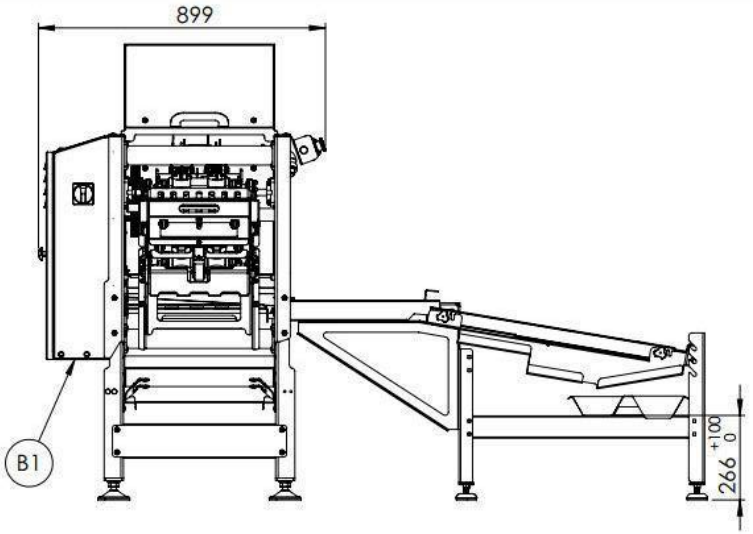

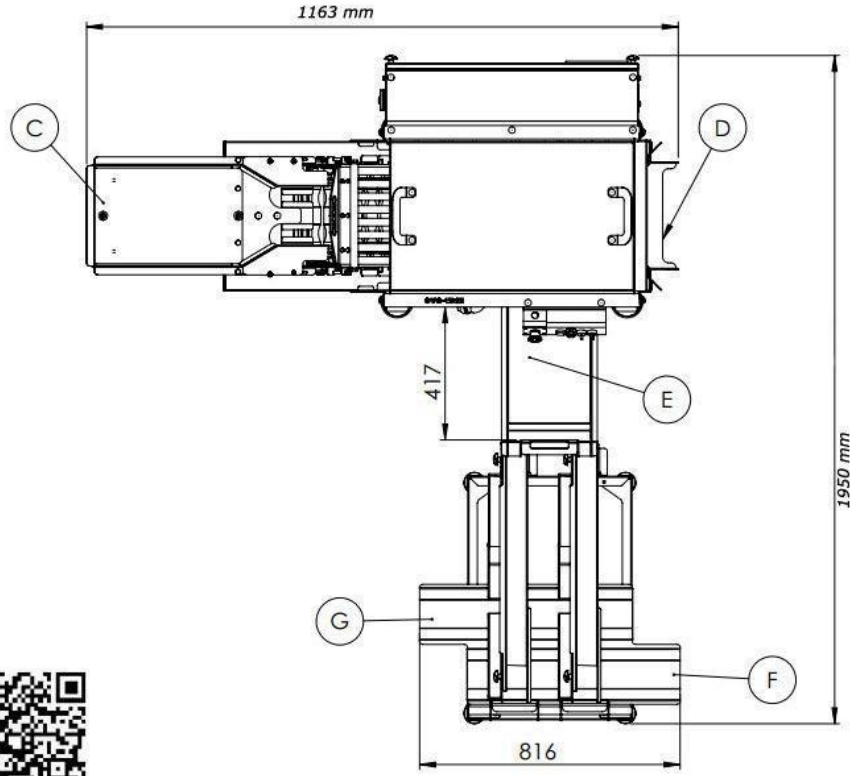

RX-1	
Typical workplaces:	egg breaking facilities, bakeries, confectioneries, pasta making companies
Capacity:	max 6400 eggs/hour
Power supply:	1 kW 230 V 1/N/PE 50/60 Hz 1 kW 110V 1/N/PE 50/60HZ + VFD
Water connection:	input 1"
Compressed air connection:	-
Minimal workspace:	2950 x 2165 mm
Dimensions:	1950 x 1163 x 1480 mm
Operated by:	1-2 person
Minimal wall clearance:	the rear side ~500 mm
Additional information	N/A
A	control panel
B1/B2	connections: electrical/water
C	eggs input
D	eggshells outlet
E	liquid egg outlet
F	egg yolks outlet
G	egg white outlet

OVO TECH
EGG PROCESSING MACHINES

All rights reserved
Information presented in this drawing is the sole property of OVO-TECH. Any use of this material, including reproduction of parts or in whole without a written permission is strictly prohibited.